

Product Solution

Edition:

V1.0

Release date:

2022/08-26

Customer :

Battery model name:

ION PRO MAX U-P51200-9C

Applicable Products:

Doc.No:

Spec-Pack-3479

Customer approval

Comment:

Customer's signature/ Date : _____

Approved	Checked	Prepared

SolarPro Caribbean

Email: info@solarpropr.com

Phone: (787) 239-9847

Location: PR-1, Caguas, Puerto Rico, 00725 6.7 km

REVISION AND UPDATES

catalog

1. Scope :	4
2. Normal performance:	4
3. Product dimension drawing:	6
4. Terminal definition:	6
5. BMS/PCM Parameters:	7
6. Instructions	10
7. The data curve:	11
8. Disclaimers:	13

1. Scope :


This specification is applicable to rechargeable battery pack products designed and developed for SolarPro Caribbean.

2. Normal performance:


	NO.	Item	General Parameter		Remark
	1	Combination method	16S1P		LiFePO4
Package	2	Rated Capacity	Typical	200Ah	0.2C,@25°C
			Minimum	196Ah	
	3	Rated Voltage	51.2V		
	4	Factory SOC	30~60%		
	5	Voltage at end of Discharge	44.8V		Discharge Cut-off Voltage
	6	Charging mode (CC-CV)	MAX 58.4V		
	7	Internal Impedance	≤40mΩ		Internal resistance measured at AC 1KHz after 50% charge The measure must uses the new batteries that within one week after shipment and cycles less than 5 times
	8	Standard charge current	40A		Charge time : Approx 6h
		Limiting current	20A		Software opening
	9	Standard discharge	40A		
	10	Maximum Charge Current	100A		
	11	Maximum Discharge Current	100A		

	12	Operation Temperature Range	Charge: 0~55°C Discharge: -20~60°C	Bare Cell 60±25%R.H.
	13	Storage Temperature Range	Less than 12 months : -10~35°C less than 3 months: -10~45°C Less than 7 day : -20~65°C	60±25%R.H. at the shipment state
	14	Dimensions	L650*W485*H246mm	
	15	Weight	90kg	
	16	Volumetric specific energy	132.1WH/L	
	17	Gravimetric specific energy	113.8WH/KG	
	18	Communication mode	RS485/CAN	
	19	Battery software version	V1.0	
	21	Maximum series number	Forbid	
	22	Maximum number of parallels	15PCS	Please refer to 6.3 parameters for serial use

3. Product dimension drawing:

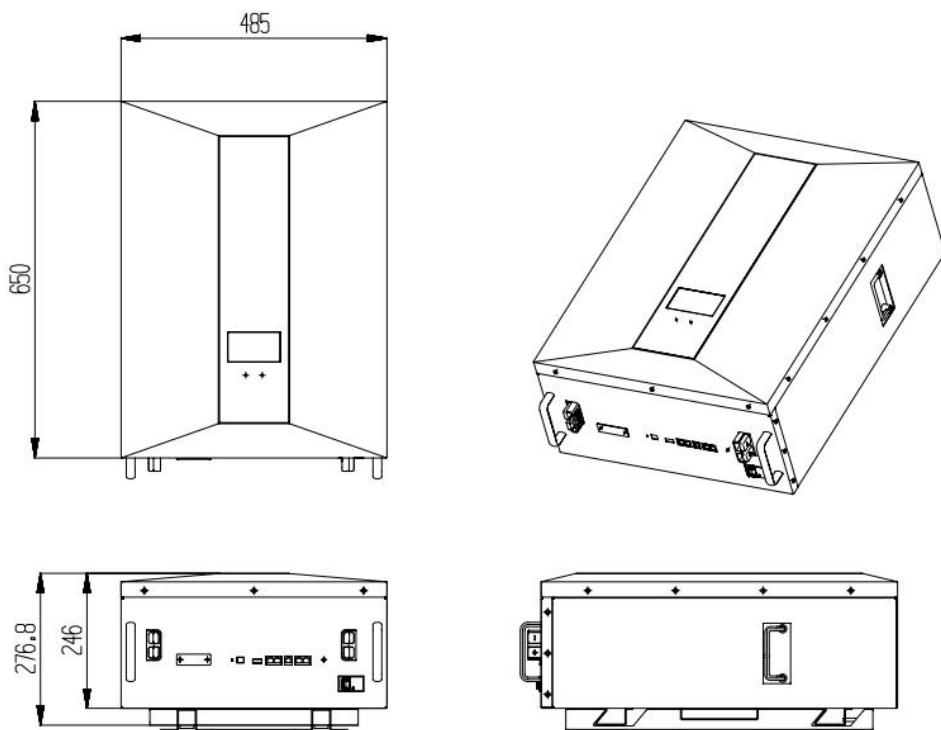

4. Terminal definition:

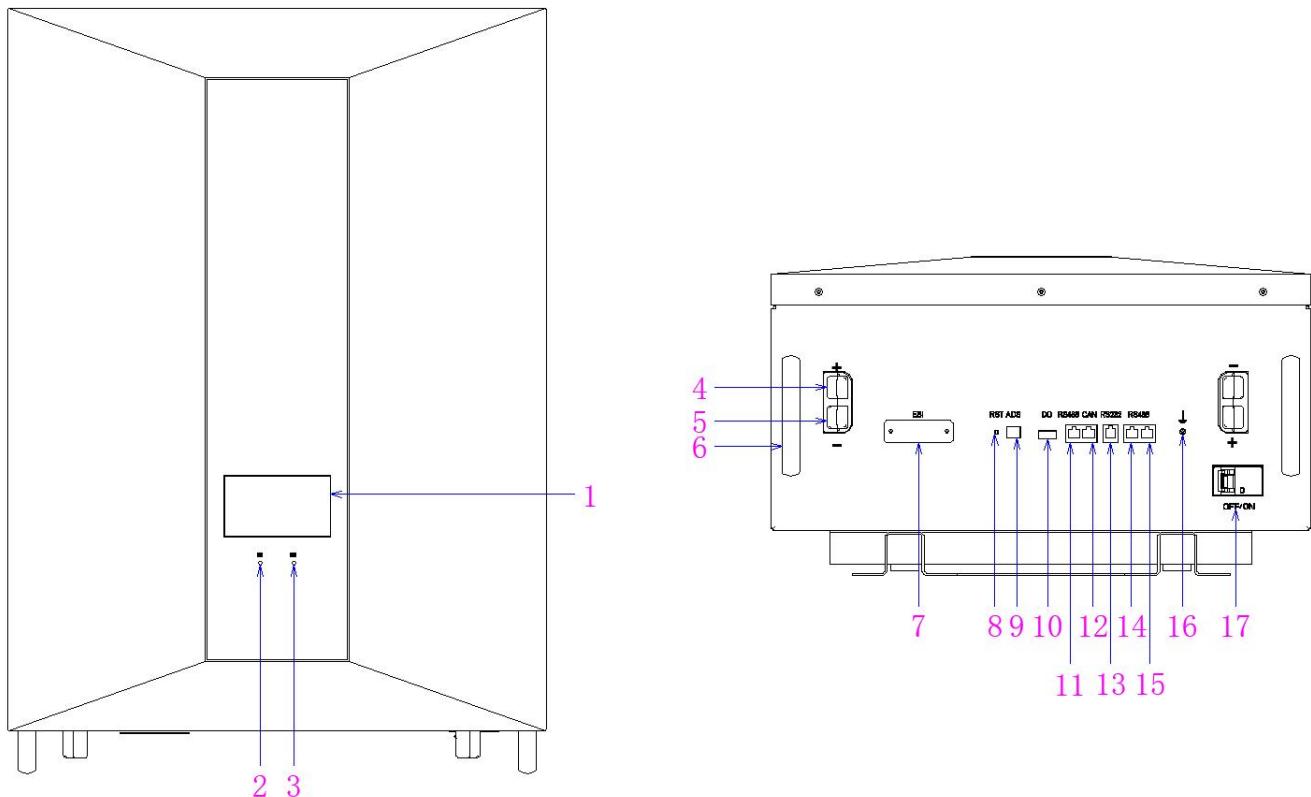

NO.	Description	Function description
1	HMI	Display battery status information
2	ALM	Alarm and protection
3	RUN	work
4	Battery+	Positive terminal
5	Battery-	Negative terminal
6	Handle	handing
7	External interface	Expand Bluetooth / WiFi / GSM functions
8	Reset key	On/OFF button
9	ADS Dialer	Display connection address
10	Dry contact	1/2 Normally open, closed during fault protection 3/4 Normally open, closed when a low battery alarm signal has occurred
11	RS485	RS485 communication interface
12	CAN	CAN communication interface
13	RS232	RS232 communication interface (for battery condition monitoring)
14	RS485	RS485 communication interface (Used in communication parallel, and for battery condition monitoring or manufacturer to debug or service)
15	RS485	RS485 communication interface (Used in communication parallel, and for battery condition monitoring or manufacturer to debug or service)
16	Ground wire	Ground wire port
17	MCB	Output ON/OFF

5. BMS/PCM Parameters:

NO	Indicator item	Windows default	Optional	Remarks
1	Cell overcharge protection	Cell overcharge alarm voltage	3600mV	Optional
		Cell overcharge protection voltage	3650mV	Optional
		Cell overcharge protection delay	4S	Optional
1	Removal of Cell over voltage protection	Cell overcharge protection Relief voltage	3380mV	Optional
		Capacity Relieve	SOC < 96%	Optional
		Discharge release	Discharge current > 1A	
2	Cell over discharge protection	Cell over discharge alarm voltage	2900mV	Optional
		Cell over discharge protection voltage	2800mV	Optional
		Over discharge protection delay	1S	Optional
2	Release of Cell over discharge protection	Cell over discharge protection Relief voltage	3000mV	Optional
		Discharge of charge	The access charger may be activated.	Over discharge protection for 30 seconds After that, it is still unable to recover When it comes back, it will enter Low power mode

	Overall overcharge protection	Overall overcharge alarm voltage	57.6V	Optional		
		Overall overcharge protection voltage	58.4V	Optional		
		Overall over-charge protection delay	4S	Optional		
3	Overall over voltage protection lifted	Overall over-charge protection release voltage	54V	Optional		
		Capacity Relieve	SOC < 96%	Optional		
		Discharge release	Discharge current > 1A			
4	Overall over discharge protection Protection	Overall over amplifier alarm voltage	46.4V	Optional		
		Overall over discharge protection voltage	44.8V	Optional		
		Overall overplay protection delay	1S	Optional		
	Over discharge protection is lifted.	Overall over discharge protection Relief voltage	48V	Optional		
		When there is a charge, it is unloaded.	Access charger can be activated			
5	Charging current limiting function	Charging current limiting current	20A		Current limit opening can be set and maximum opening Current value 100A	
6	Charging over current protection	Charging over current alarm current	105A	Optional	If it appears 10 times in a row, the state will be locked and will not be released automatically	
		Charging over current protection current	110A	Optional		
		Charging over current protection delay	1S	Optional		
	Discharge of charging over current protection	Automatic release	Automatic release after 1min			
		Discharge release	Discharge current > 1A			
7	Discharge over current level 1 protection	Discharge overcurrent level 1 alarm current	105A	Optional	If it appears 10 times in a row, the state will be locked and will not be released automatically	
		Discharge over current level 1 protection current	110A	Optional		
		Discharge over current level 1 protection delay	1S	Optional		
	Discharge over current level 1 protection release	Automatic release	Automatic release after 1min			
		Charge release	Charging current > 1A			
8	Discharge over	Discharge over current level 2 protection current	≥150A	Optional		

	current level 2 protection	Discharge over current level 2 protection delay	100mS	Optional	If it appears 10 times in a row, the state will be locked and will not be released automatically
8	Discharge over current level 2 protection release	Automatic release	Automatic release after 1min		
		Charge release	Charging current > 1A		
9	Short-circuit protection	Short circuit protection current	$\geq 350A$		
		Short circuit protection delay	$\leq 300\mu S$		
		Short circuit protection released	When there is charging, the short circuit protection is removed		
			When the load is removed, it is automatically unloaded		
10	MOS high temperature protection	MOS over-temperature alarm temperature	90°C	Optional	
		MOS over temperature protection temperature	115°C	Optional	
		MOS protection release temperature	85°C	Optional	
11	Cell temperature protection	Charging low temperature alarm temperature	5°C	Optional	
		Charging low temperature protection temperature	0°C	Optional	
		Charging low temperature protection release temperature	5°C	Optional	
		Charging high temperature alarm temperature	50°C	Optional	
		Charging high temperature protection temperature	55°C	Optional	
		Charging high temperature protection release temperature	45°C	Optional	
		Discharge low temperature alarm temperature	-15°C	Optional	
		Discharge low temperature protection temperature	-20°C	Optional	
		Discharge low temperature protection release temperature	-15°C	Optional	
		Discharge high temperature alarm temperature	55°C	Optional	
		Discharge high temperature protection temperature	60°C	Optional	
		Discharge high temperature protection release temperature	50°C	Optional	
12	Ambient temperature	Ambient low temperature alarm temperature	-15°C	Optional	
		Environmental low temperature protection temperature	-20°C	Optional	
		Environmental low temperature protection release temperature	-15°C	Optional	
		Ambient high temperature alarm temperature	55°C	Optional	

		Environmental high temperature protection temperature	75°C	Optional	
		Environmental high temperature protection release temperature	55°C	Optional	
13	Consumed current	Working self-consumption current	$\leq 45\text{mA}$ (with LCD)		
			$\leq 40\text{mA}$ (without LCD)		
		Low power mode current	$\leq 100\mu\text{A}$		
14	Equilibrium function	Balanced opening voltage	3450mV	Optional	
		Open pressure difference	30mV	Optional	
15	Low power alarm	Low power alarm threshold	SOC < 5%	Optional	No alarm during charging
16	Dormancy function	Dormancy voltage	3150mV	Optional	
		Delay time	5min	Optional	
17	Cell failure protection	Unit pressure difference	Low power alarm threshold	NO	Charging and discharging are not allowed
18	Full charge judgment	Full charge voltage	> 56V	Optional	At the same time, stop charging and update SOC to 100%
		Cut off current	< 2A	Optional	


6. Instructions

- 6.1. Please read the product manual and battery surface label carefully before use.
- 6.2. Batteries are not allowed to be connected in series.
- 6.3. Up to 15 batteries are allowed to be connected in parallel. Please turn on the current limiting module when connecting in parallel.
- 6.4. Different material chemical systems, different batches of batteries and design technical parameters can not be assembled and used together.
- 6.5. The battery pack shall be stored at room temperature and charged to 40% - 60% of the electricity.
In order to prevent over discharge, it is recommended to charge every 3 months.
- 6.6. The battery pack shall be used under the specified conditions, and the performance of the battery stored for more than one year is not guaranteed.
- 6.7. During use, keep away from heat source and high voltage, avoid children playing with the battery, and do not beat the battery.

7. The data curve:


7.1 Cycle life with DoD at 25 °C,0.2C

● Cycle life with DoD at 25 °C,0.2C

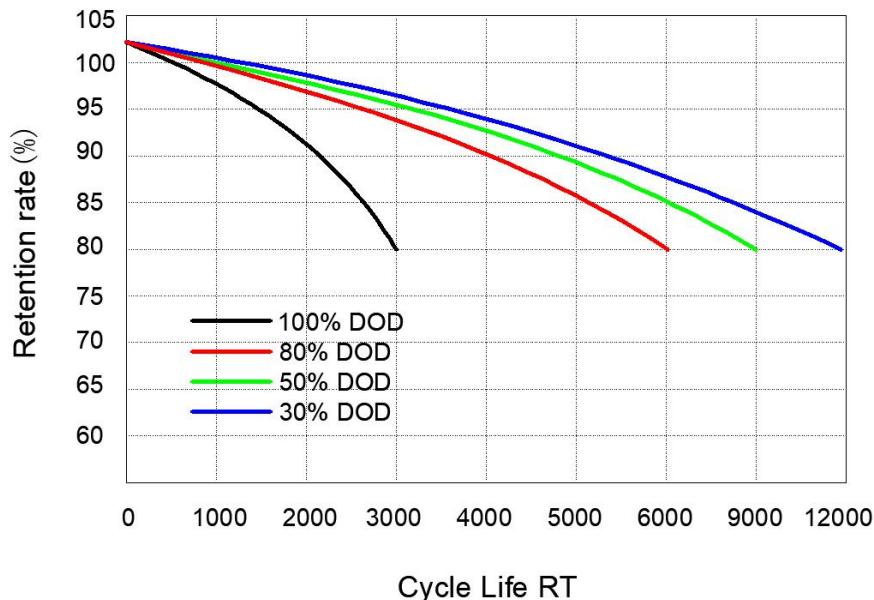


7.2 Charge and Discharge Curve &Temperature


● Charge and Discharge Curve &Temperature

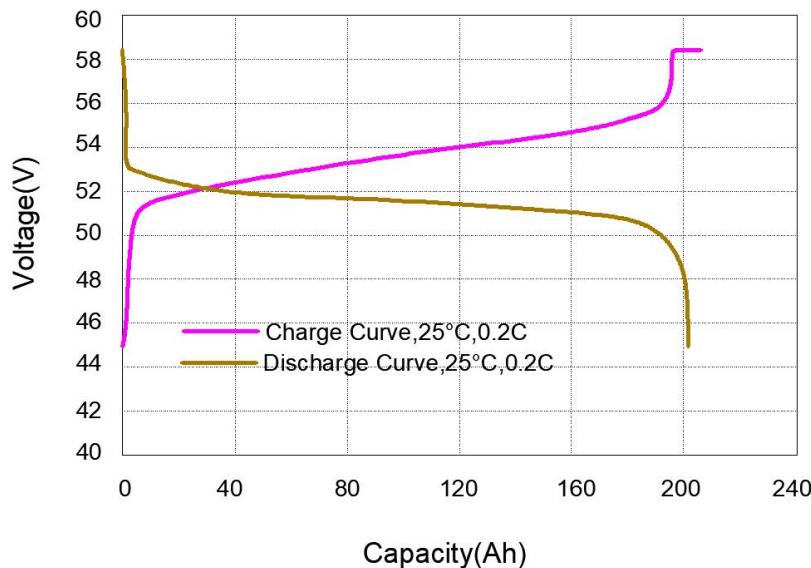


7.3 Different Rate Discharge Curve &25°C

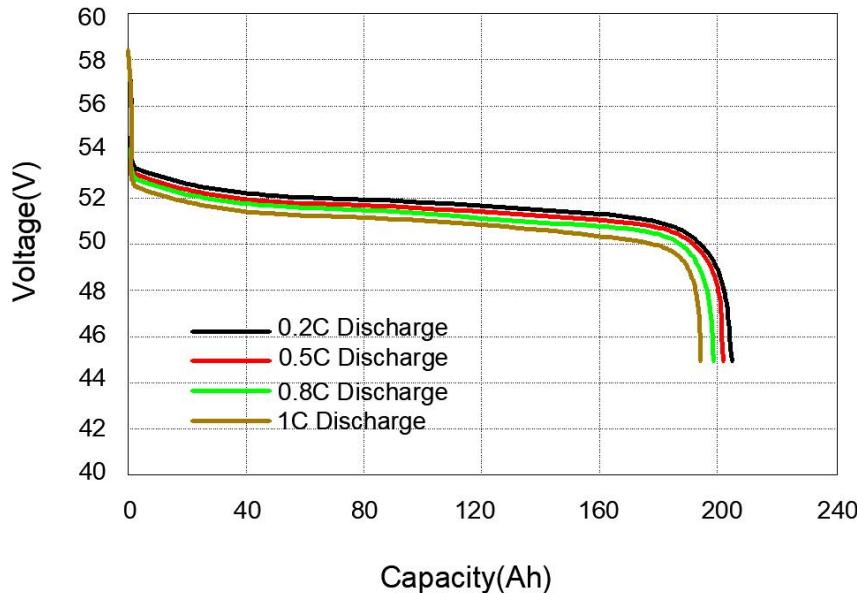● Different Rate Discharge Curve &25°C

7.4 Different Rate Charge Curve &25°C,100%DOD

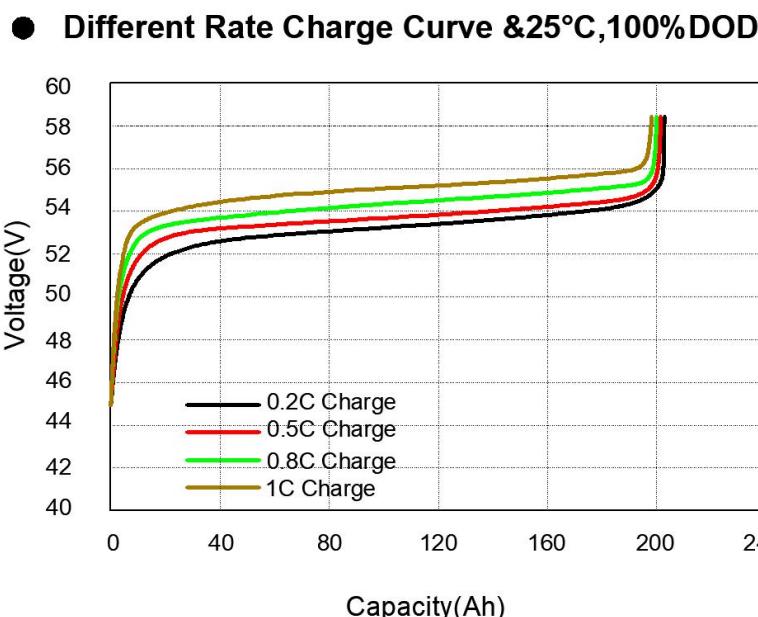

7.5 Different Temperature Discharge Curve

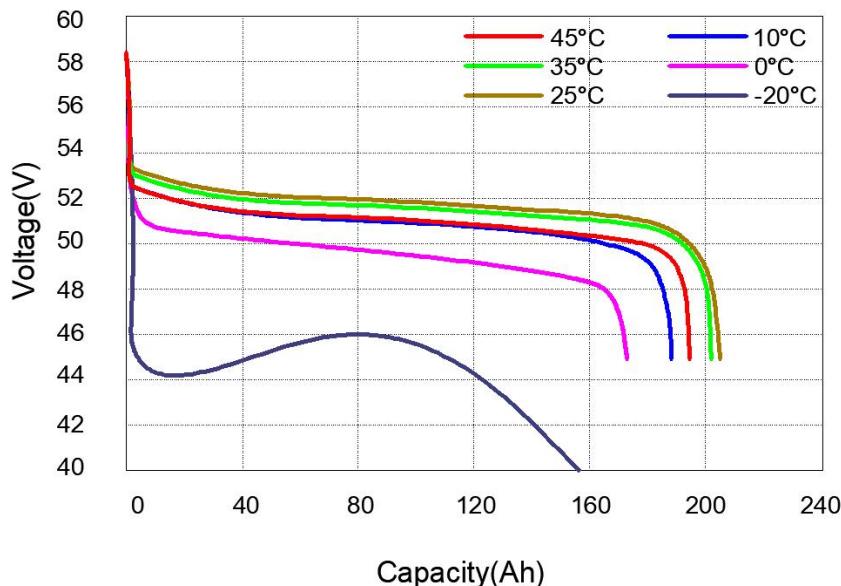● Different Temperature Discharge Curve**8. Disclaimers:**

Please read the product specification, operation manual and precautions carefully before use. Understand the use method and application scope of the product; if the product use method is wrong, the circuit connection is wrong or the input power supply is used, and the load function parameters are inconsistent with the performance parameters indicated in the product specification, it is improper use. The product, load and peripheral connectors are damaged due to improper use. The company does not assume any responsibility.

Any matters not mentioned in this specification shall be determined by both parties through negotiation.

The manufacturer reserves the right of final interpretation of this specification.